


RS1. Take down and remove from site existing school signs and post.
 RS2. Take down and remove from site existing bend sign and post.
 RS3. Take down and remove from lighting column existing school signs.

S10. Provide and erect one new sign to diag 642.2- No stopping on school zig-zag markings, as detailed on one new post.
 S11. Provide and erect one new sign to diag 642.2- No stopping on school zig-zag markings, as detailed on one new post.
 S12. Provide and erect new school signs as detailed on one new post.
 S13. Provide and erect new school signs as detailed on one new post north of lighting column.



Scheme Ref.	Mytholm Steeps Sign 10 & 11	
Sign Ref.	642.2	x-height 50.0
Letter colour	BLACK	SIGN FACE
Background	YELLOW	Width 710mm
Border	BLACK	Height 795mm
Material	Class R3B Microprismatic	Area 0.57m ²

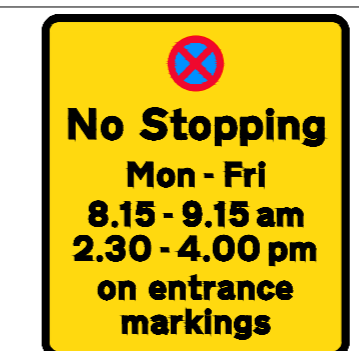

Scheme Ref.	Mytholm Steeps Sign S12 & S13	
Sign Ref.	S46	x-height 62.5
Letter colour	BLACK	SIGN FACE
Background	WHITE	Width 540mm
Border	BLACK	Height 235mm
Material	Class R3B Microprismatic	Area 0.13m ²

REV.	DATE	REVISION DETAILS	DRN.	CHKD.	APPRD.
PROJECT TITLE					
Mytholm Steeps, Hebden Bridge					
DRAWING TITLE					
School Signs Church Lane					
OFFICE PROJECT NUMBER			DRAWING STATUS		
DESCRIPTION			DRG. SIZE	DRAWN	CHECKED
			A2	JL	APPROVED
SCALE			DRAWING NUMBER		DATE
NTS			72/794/03		10-16
			REVISION		